



China

Technical Report No. 70.424.25.03294
Revision 02

Dated: Sep 17, 2025

Client: Loctek Ergonomic Technology Corp.
588 Qihang South Road, Binhai Industrial Zone, Yinzhou District, Ningbo,
Zhejiang 315145 P.R. China

Attn. to: Ms. Yaqing Tong

Manufacturing location: Loctek Ergonomic Technology Corp.
588 Qihang South Road, Binhai Industrial Zone, Yinzhou District, Ningbo,
Zhejiang 315145 P.R. China

Test object: Product: Office Pod
Model: MPD114-SR

Test specifications: Sound insulation test standard ISO 23351-1:2020
Operation condition in according to ISO 23351-1:2020

Purpose of examination: The conformity test for client's requirement

Test result: Test results see clause 3

This technical report may only be quoted in full. Any use for advertising purposes must be granted in writing. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production.



China

1. Description of the test object

1.1 Function

Sound protecting

1.2 Technical Data

Model:

MPD114-SR

Spec.

2300mm*1050mm*1050mm

2. Order

2.1 Date of Purchase Order: 07.04.2025

2.2 Date of receipt of test subject: 21.04.2025

2.3 Date of Testing 21.04.2025

2.4 Location of Testing

TÜV SÜD SW RAIL TRANSPORTATION TECHNOLOGY(JLANGSU) Co., Ltd.

The measurement is performed by project engineer of TÜV SÜD China.




China

3. Test results

Volume Reverberation Room	201m ³	Date	21.04.2025
Temperature	22°C	RH	63%
		Wind	0 m/s
Description of Test Arrangement	The sample is installed on-site by the client in the reverberation room test area. The door of the specimen is opened and closed repeatedly for ten times and test without further adjustment.		

Frequency f / Hz	125	250	500	1000	2000	4000	8000
Speech Level Reduction D / dB	27.6	30.3	29.9	30.6	32.8	37.4	42.2
Speech Level Reduction D _{S,A} / dB	30.4						
Class	A						

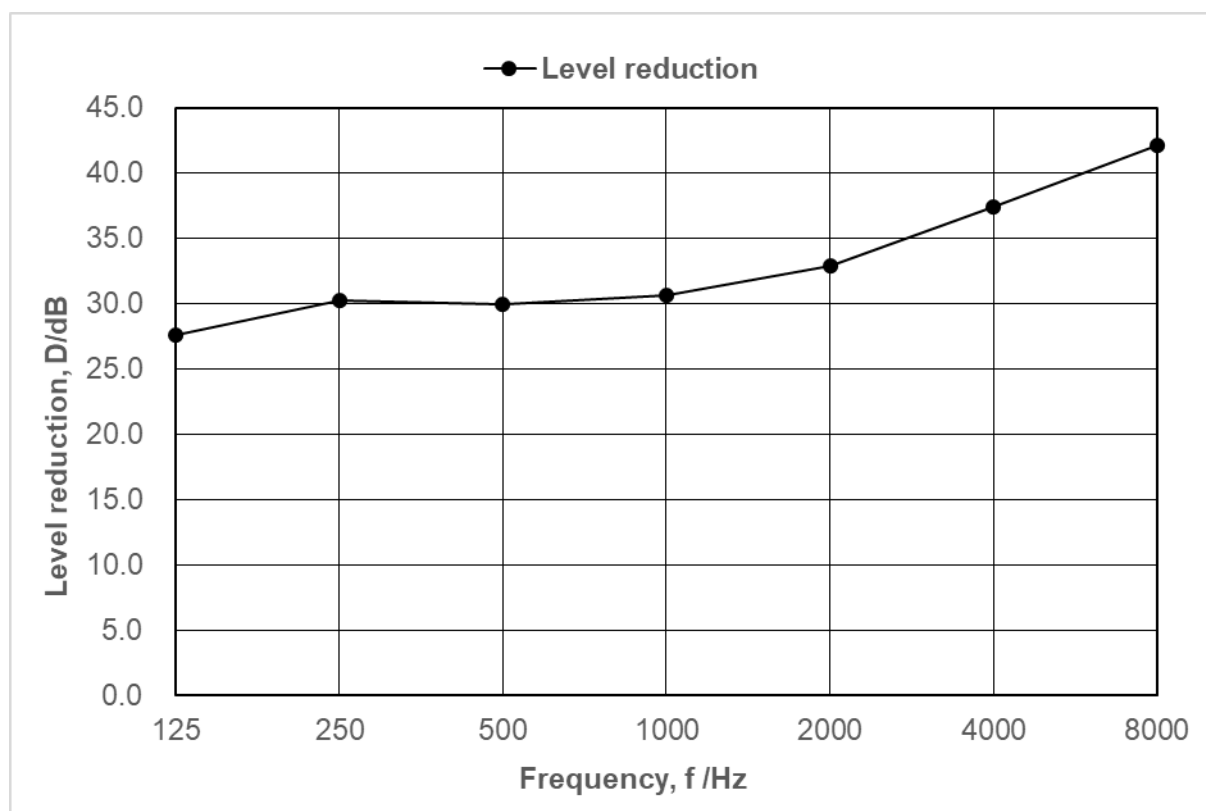

Note:

1. The measurements are made in accordance with ISO 23351-1:2020.
2. The results are only valid for the tested specimen configuration, Changes in size, geometry or materials can lead to significant changes in reported results.
3. This declaration of conformity is only based on the result of this laboratory activity, the impact of the uncertainty of the results was not included.
4. The table below gives a general classification for enclosures that can be used voluntarily in the selection of appropriate enclosures, Class A+, A B, c and D produce acceptable speech privacy if the background noise level of the room is at least 27dB, 30dB, 35dB, 40dB and 45dB L_{Aeq} , respectively. In other words, the lower is the background noise the higher is the target value for $D_{S,A}$. If the enclosure is used in various rooms, the class should be chosen according to the room where the background noise level is the lowest.

Class	A+	A	B	C	D	Unclassified
$D_{S,A}$	>33	>30	>25	>20	>15	≤15

Test picture





4. Test equipment list

Name	Type	Serial Nr.	Manufacturer	Calibration Period of validity until
Sound meter	XL2 + M2230	EC-JB-009-1	NTI	13/08/2025
Calibrator	CAL200	EC-JB-009-3	NTI	13/08/2025
Sound source	DS3-1	EC-JB-009-2	NTI	13/08/2025

TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch

Project Engineer

Zhenxiang Hu



Project Manager

Sheng Qian

